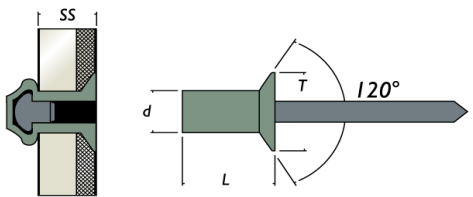


Rivet Etanche Alu Acier Tête Fraisée						
						
Corps : Alu (AL Mg 5)				Tige : Acier Zingué		
D ₁ (mm)	L corps (mm)	Plage serrage (mm)	D perçage (mm)	D ₂ tête (mm)	Résistance traction (DaN)	Résistance cisaillement (DaN)
3.2	7.5	0,5-3,0	3.3	6	120	100
	9	3,0-4,5				
	10.5	4,5-6,0				
	12	6,0-7,5				
4	9.5	0,5-4,5	4.1	8	210	150
	11	4,5-6,5				
	12.5	6,5-8,0				
	14	8,0-9,5				
4.8	9.5	1,0-4,5	5	9.5	300	230
	11	4,5-6,5				
	12.5	6,5-8,0				
	14	8,0-9,5				
	15.5	9,5-11,0				
	19	11,5-14,5				
	23.5	14.5 à 16				